




Steckkupplungs-Stecker BG4 Typ ST4...-S / Quick release coupling male type ST4...-S				
Baugröße 4. Betriebsdruck: max. 250 bar / Size 4				
Art. Nr.	Bezeichnung	D1	R1	G1
Art. N°	Description	(mm)		
288.710	ST4-IG G3/4"-S	29	-	IG G3/4"
288.711	ST4-IG M22x1,5-S	29	-	IG M22x1,5
288.720	ST4-12L-S	29	L12	M18x1,5
288.721	ST4-15L-S	29	L15	M22x1,5
288.722	ST4-18L-S	29	L18	M26x1,5
288.723	ST4-22L-S	29	L22	M30x2
288.730	ST4-16S-S	29	S16	M24x1,5
288.731	ST4-20S-S	29	S20	M30x2




Steckkupplungs-Muffe BG4 Typ ST4...-M / Quick release coupling female type ST4...-M			
Baugröße 4. Betriebsdruck: max. 250 bar / Size 4			
Art. Nr.	Bezeichnung	R1	G1
Art. N°	Description		
288.610	ST4-IG G3/4"-M	-	IG G3/4"
288.611	ST4-IG M22x1,5-M	-	IG M22x1,5
288.620	ST4-12L-M	L12	M18x1,5
288.621	ST4-15L-M	L15	M22x1,5
288.622	ST4-18L-M	L18	M26x1,5
288.623	ST4-22L-M	L22	M30x2
288.630	ST4-16S-M	S16	M24x1,5
288.631	ST4-20S-M	S20	M30x2

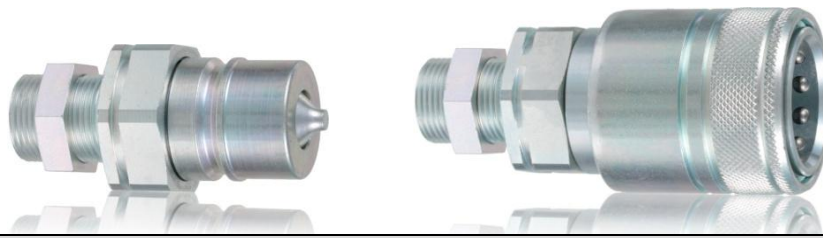

Steckkupplungs-Stecker BG4 Typ STS4...-S / Quick release coupling male type STS4...-S Schottausführung, Baugröße 4. Betriebsdruck: max. 250 bar / Bulkhead, size 4				
Art. Nr.	Bezeichnung	D1	R1	G1
Art. N°	Description	(mm)		
288.740	STS4-12L-S	29	L12	M18x1,5
288.741	STS4-15L-S	29	L15	M22x1,5
288.742	STS4-18L-S	29	L18	M26x1,5
288.743	STS4-22L-S	29	L22	M30x2
288.750	STS4-16S-S	29	S16	M24x1,5
288.751	STS4-20S-S	29	S20	M30x2

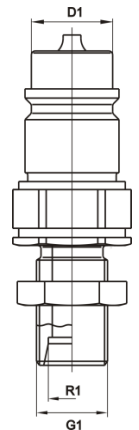

Steckkupplungs-Muffe BG4 Typ STS4...-M / Quick release coupling female type STS4...-M Schottausführung, Baugröße 4. Betriebsdruck: max.250 bar / Bulkhead, size 4			
Art. Nr.	Bezeichnung	R1	G1
Art. N°	Description		
288.640	STS4-12L-M	L12	M18x1,5
288.641	STS4-15L-M	L15	M22x1,5
288.642	STS4-18L-M	L18	M26x1,5
288.643	STS4-22L-M	L22	M30x2
288.650	STS4-16S-M	S16	M24x1,5
288.651	STS4-20S-M	S20	M30x2

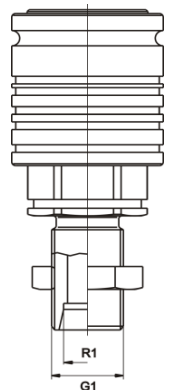

D1 (mm) Durchmesser / Diameter
R1 Rohrgröße / Pipe size
G1 Gewinde / Thread