



<b>Kupplungsstecker BG3 Typ STF3...-S / Quick release coupling male type STF3...-S</b>				
Baugröße 3, flachdichtend. Betriebsdruck: max. 350 bar / Size 3, flat face				
Art. Nr. Art. N°	Bezeichnung Description	D1 (mm)	R1	G1
287.401	STF3-IG G1/2"-S	24,5	-	IG G1/2"
287.402	STF3-IG G3/4"-S	24,5	-	IG G3/4"
287.403	STF3-IG M22x1,5-S	24,5	-	IG M22x1,5
287.410	STF3-12L-S	24,5	L12	M18x1,5
287.411	STF3-15L-S	24,5	L15	M22x1,5
287.412	STF3-18L-S	24,5	L18	M26x1,5
287.420	STF3-12S-S	24,5	S12	M20x1,5
287.422	STF3-16S-S	24,5	S16	M24x1,5



<b>Kupplungsmuffe BG3 Typ STF3...-M / Quick release coupling female type STF3...-M</b>				
Baugröße 3, flachdichtend. Betriebsdruck: max. 350 bar / Size 3, flat face				
Art. Nr. Art. N°	Bezeichnung Description		R1	G1
287.301	STF3-IG G1/2"-M		-	IG G1/2"
287.302	STF3-IG G3/4"-M		-	IG G3/4"
287.303	STF3-IG M22x1,5-M		-	IG M22x1,5
287.310	STF3-12L-M		L12	M18x1,5
287.311	STF3-15L-M		L15	M22x1,5
287.312	STF3-18L-M		L18	M26x1,5
287.320	STF3-12S-M		S12	M20x1,5
287.322	STF3-16S-M		S16	M24x1,5

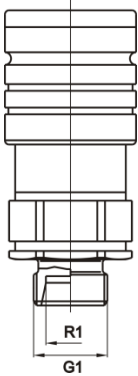

<b>Kupplungsstecker BG3 Typ STFS3...-S / Quick release coupling male type STFS3...-S</b>				
Schottausführung, flachdichtend, Baugröße 3. Betriebsdruck: max. 350 bar / Bulkhead, flat face, size 3				
Art. Nr. Art. N°	Bezeichnung Description	D1 (mm)	R1	G1
287.430	STFS3-12L-S	24,5	L12	M18x1,5
287.431	STFS3-15L-S	24,5	L15	M22x1,5
287.432	STFS3-18L-S	24,5	L18	M26x1,5
287.440	STFS3-12S-S	24,5	S12	M20x1,5
287.442	STFS3-16S-S	24,5	S16	M24x1,5

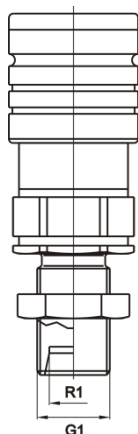

<b>Kupplungsmuffe BG3 Typ STFS3...-M / Quick release coupling female type STFS3...-M</b>				
Schottausführung, flachdichtend, Baugröße 3. Betriebsdruck: max. 350 bar / Bulkhead, flat face, size 3				
Art. Nr. Art. N°	Bezeichnung Description		R1	G1
287.330	STFS3-12L-M		L12	M18x1,5
287.331	STFS3-15L-M		L15	M22x1,5
287.332	STFS3-18L-M		L18	M26x1,5
287.340	STFS3-12S-M		S12	M20x1,5
287.342	STFS3-16S-M		S16	M24x1,5