



Steckkupplungs-Stecker BG6 Typ ST6...-S / Quick release coupling male type ST6...-S				
Baugröße 6. Betriebsdruck: max. 250 bar/ Size 6				
Art. Nr. Art. N°	Bezeichnung Description	D1 (mm)	R1	G1
288.910	ST6-IG G3/4"-S	34,3	-	IG G3/4"
288.911	ST6-IG G1"-S	34,3	-	IG G1"
288.920	ST6-18L-S	34,3	L18	M26x1,5
288.921	ST6-22L-S	34,3	L22	M30x2
288.922	ST6-28L-S	34,3	L28	M36x2
288.930	ST6-20S-S	34,3	S20	M30x2
288.931	ST6-25S-S	34,3	S25	M36x2
288.932	ST6-30S-S	34,3	S30	M42x2




Steckkupplungs-Muffe BG6 Typ ST6...-M / Quick release coupling female type ST6...-M				
Baugröße 6. Betriebsdruck: max. 250 bar / Size 6				
Art. Nr. Art. N°	Bezeichnung Description	R1	G1	
288.810	ST6-IG G3/4"-M	-	IG G3/4"	
288.811	ST6-IG G1"-M	-	IG G1"	
288.820	ST6-18L-M	L18	M26x1,5	
288.821	ST6-22L-M	L22	M30x2	
288.822	ST6-28L-M	L28	M36x2	
288.830	ST6-20S-M	S20	M30x2	
288.831	ST6-25S-M	S25	M36x2	
288.832	ST6-30S-M	S30	M42x2	

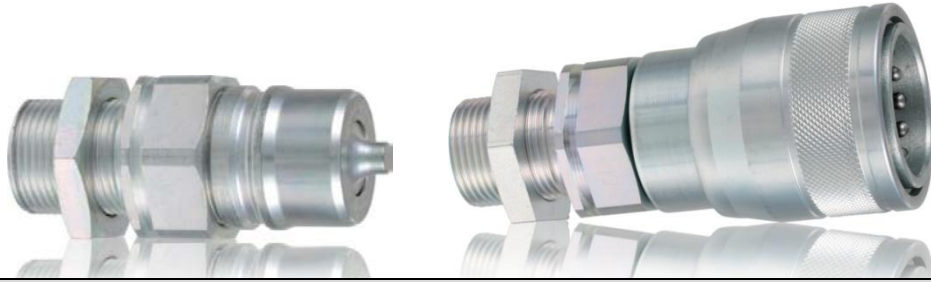


Steckkupplungs-Stecker BG6 Typ STS6...-S / Quick release coupling male type STS6...-S
Schottausführung, Baugröße 6. Betriebsdruck: max. 250 bar / Bulkhead, size 6

Art. Nr. Art. N°	Bezeichnung Description	D1 (mm)	R1	G1
288.940	STS6-18L-S	34,3	L18	M26x1,5
288.941	STS6-22L-S	34,3	L22	M30x2
288.942	STS6-28L-S	34,3	L28	M36x2
288.950	STS6-20S-S	34,3	S20	M30x2
288.951	STS6-25S-S	34,3	S25	M36x2
288.952	STS6-30S-S	34,3	S30	M42x2

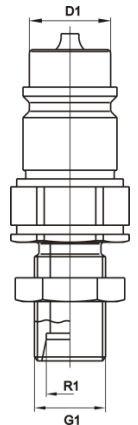

Steckkupplungs-Muffe BG6 Typ STS6...-M / Quick release coupling female type STS6...-M
Schottausführung, Baugröße 6. Betriebsdruck: max. 250 bar / Bulkhead, size 6

Art. Nr. Art. N°	Bezeichnung Description	R1	G1
288.840	STS6-18L-M	L18	M26x1,5
288.841	STS6-22L-M	L22	M30x2
288.842	STS6-28L-M	L28	M36x2
288.850	STS6-20S-M	S20	M30x2
288.851	STS6-25S-M	S25	M36x2
288.852	STS6-30S-M	S30	M42x2

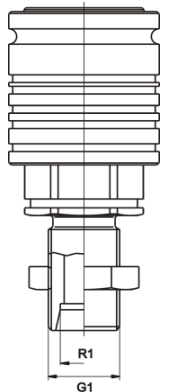

D1 (mm) Durchmesser / Diameter
R1 Rohrgröße / Pipe size
G1 Gewinde / Thread