




Kupplungsstecker BG4 Typ STF4...-S / Quick release coupling male type STF4...-S				
Baugröße 4, flachdichtend. Betriebsdruck: max. 350 bar / Size 4, flat face				
Art. Nr. Art. N°	Bezeichnung Description	D1 (mm)	R1	G1
287.650	STF4-IG G3/4"-S	30	-	IG G3/4"
287.651	STF4-IG G1"-S	30	-	IG G1"
287.655	STF4-18L-S	30	L18	M26x1,5
287.656	STF4-22L-S	30	L22	M30x2
287.657	STF4-28L-S	30	L28	M36x2
287.665	STF4-20S-S	30	S20	M30x2
287.666	STF4-25S-S	30	S25	M36x2
287.667	STF4-30S-S	30	S30	M42x2

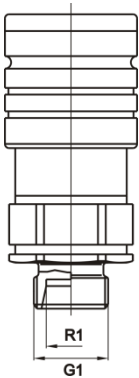

Kupplungsmuffe BG4 Typ STF4...-M / Quick release coupling female type STF4...-M				
Baugröße 4, flachdichtend. Betriebsdruck: max. 350 bar / Size 4, flat face				
Art. Nr. Art. N°	Bezeichnung Description		R1	G1
287.600	STF4-IG G3/4"-M		-	IG G3/4"
287.601	STF4-IG G1"-M		-	IG G1"
287.605	STF4-18L-M		L18	M26x1,5
287.606	STF4-22L-M		L22	M30x2
287.607	STF4-28L-M		L28	M36x2
287.615	STF4-20S-M		S20	M30x2
287.616	STF4-25S-M		S25	M36x2
287.617	STF4-30S-M		S30	M42x2

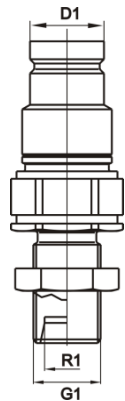

Kupplungsstecker BG4 Typ STFS4...-S / Quick release coupling male type STFS4...-S				
Schottausführung, flachdichtend, Baugröße 4. Betriebsdruck: max. 350 bar / Bulkhead, flat face, size 4				
Art. Nr. Art. N°	Bezeichnung Description	D1 (mm)	R1	G1
287.675	STFS4-18L-S	30	L18	M26x1,5
287.676	STFS4-22L-S	30	L22	M30x2
287.677	STFS4-28L-S	30	L28	M36x2
287.680	STFS4-20S-S	30	S20	M30x2
287.681	STFS4-25S-S	30	S25	M36x2
287.682	STFS4-30S-S	30	S30	M42x2

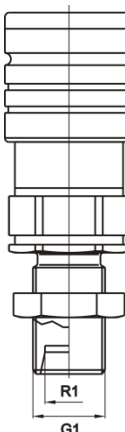

Kupplungsmuffe BG4 Typ STFS4...-M / Quick release coupling female type STFS4...-M				
Schottausführung, flachdichtend, Baugröße 4. Betriebsdruck: max. 350 bar / Bulkhead, flat face, size 4				
Art. Nr. Art. N°	Bezeichnung Description		R1	G1
287.625	STFS4-18L-M		L18	M26x1,5
287.626	STFS4-22L-M		L22	M30x2
287.627	STFS4-28L-M		L28	M36x2
287.630	STFS4-20S-M		S20	M30x2
287.631	STFS4-25S-M		S25	M36x2
287.632	STFS4-30S-M		S30	M42x2